


Royal Digital III the Magic Stylus Calculator

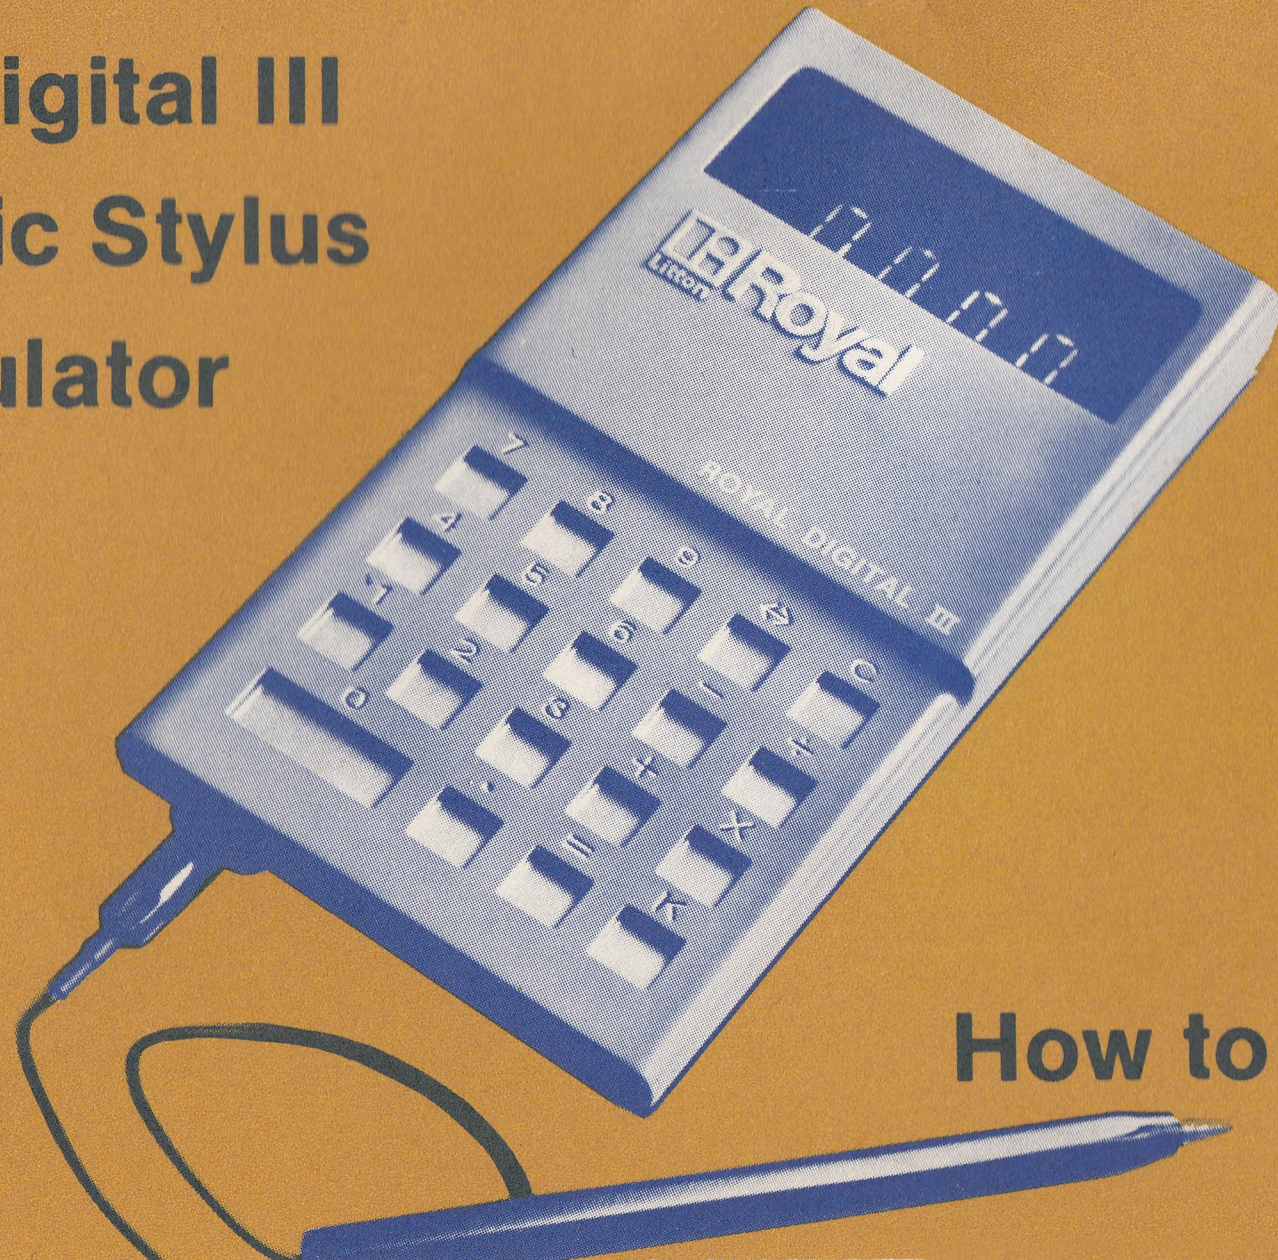

How to use it . . .

Battery Powered for Mobility

Your Digital III is truly a personal electronic calculator. In your coat pocket — or attached to your belt it can accompany you everywhere.



How long will a Digital III operate without recharge?
3 to 4 hours' operation.


How will I know the battery needs recharging?
When the screen will not light up or register figures.

How do I recharge the battery?
Plug in the battery charger furnished with your Digital III to any AC outlet and attach the calculator to it.

Within 14-16 hours the Digital III is completely recharged.

During recharge, you may operate your Digital III as usual.

A good plan is to keep your Digital III on charge whenever it is not in use.

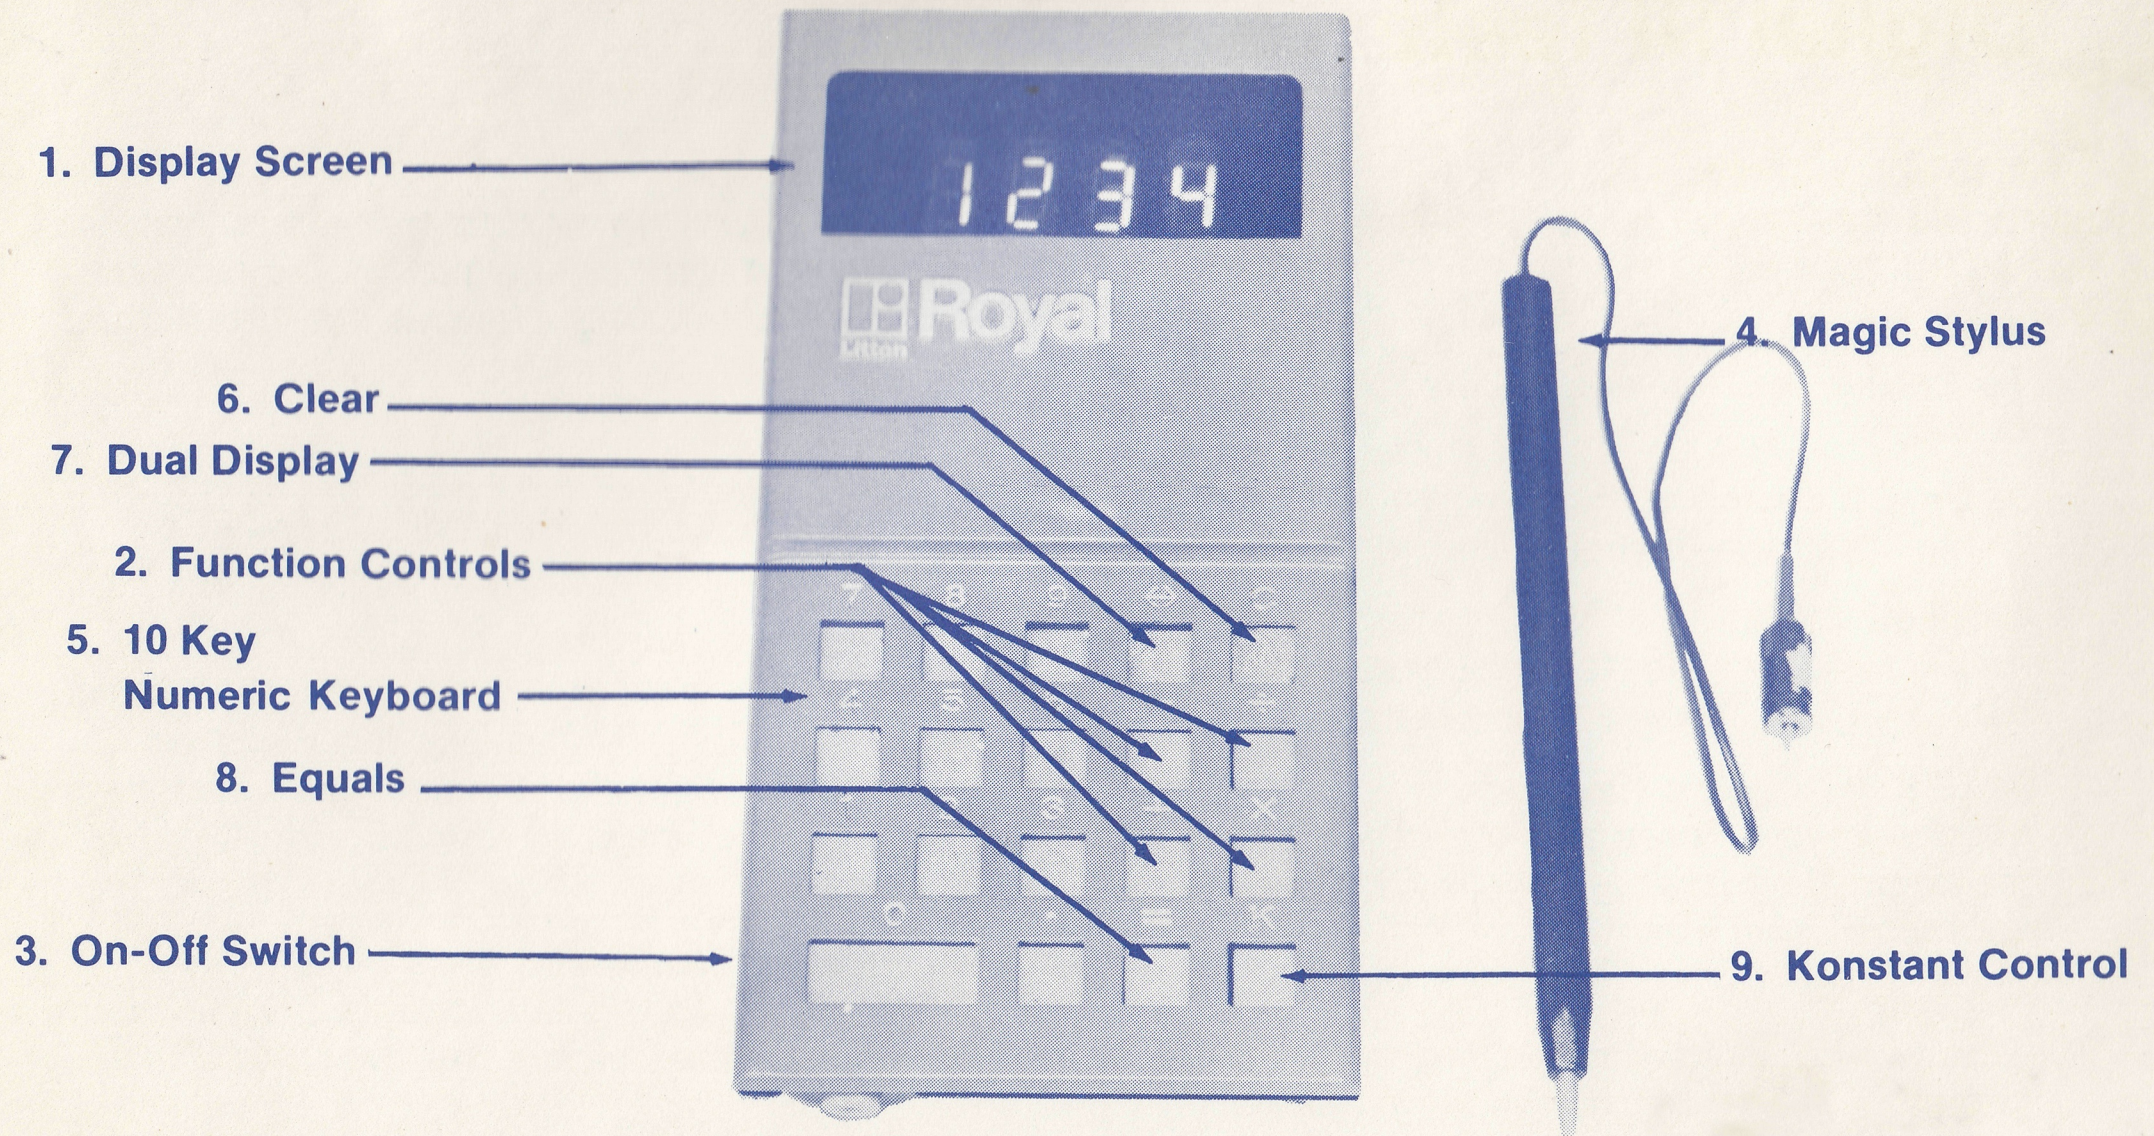

Digital III features

1. Display Screen

Lights instantly when switch is on. Bright digitron tubes.

2. Function Controls

Touch the desired square for each of these functions.


3. On-Off Switch

At the left of the keyboard.

4. Magic Stylus

An exclusive tool for fast, accurate feed-in of data. Plugs in below the keyboard.

5. 10 Key Numeric Keyboard

Numbers are entered as they are written. Touch the decimal square  whenever a decimal appears in a number.

6. Clear

After turning the switch on, touch this square to clear all figures stored in the machine.




7. Dual Display

If any answer has more than 4 digits, you may see up to 4 additional digits by touching this square. Retouching it causes the first 4 digits to reappear.

8. Equals

After entering a problem depress this square to get your answer on the display screen. A negative answer is preceded by a minus sign!

9. Konstant Control

After entering a desired number and touching the Equals square  touch the Konstant square  to enter the number as a konstant. Remove a konstant by touching the Clear square 

10. Floating Decimal

The decimal point is full floating, appearing on the display screen whenever the calculation requires it.

Operating Instructions

ROYAL DIGITAL III Operating Instructions

Plug in Stylus below keyboard, turn power on and touch Clear [C] with stylus.

PROBLEM	TOUCH	ANSWER SCREEN
TO ADD $467 + 28$	4 6 7 + 2 8 =	495.0
TO SUBTRACT $467 - 28$	4 6 7 - 2 8 =	439.0
TO MULTIPLY 27×3.2	2 7 \times 3 . 2 =	86.40
TO DIVIDE $467 \div 28$	4 6 7 \div 2 8 =	16.67
TO CHAIN CALCULATE $467 \times 7 \div 16$	4 6 7 \times 7 \div 1 6 =	204.3
TO USE CONSTANT $12 = K$ (Constant)	1 2 = K	12.00
$60 \div (12)$	6 0 \div	5.000
$3 \times (12)$	3 \times	36.00
TO REMOVE CONSTANT	C	0000
TO READ ANSWERS WITH MORE THAN 4 NUMBERS 478×2849	4 7 8 \times 2 8 4 9 =	1361
TO SEE REMAINING NUMBERS	\leftrightarrow	822.0
TO RETURN TO FIRST 4 NUMBERS	\leftrightarrow	1361

IF YOU NEED SERVICE

For the address of your Royal Special Products Service Center, contact the Royal Branch Sales Office nearest you.

TO CORRECT MISTAKES

1. To remove an incorrect function entry (+ - \times \div) simply enter the right one.
2. To remove an incorrect numeric entry (8 + 15 instead of 8 + 17), touch the Clear (C), the function before the incorrect entry (+), and the Correct entry (15).

Royal Electronic Calculators One Year Warranty

Your new Royal electronic calculator is warranted for replacement of all defective parts at no charge other than labor and shipping within 1 year of purchase. No labor charge within 90 days. During this 90-day period we will repair or replace your unit at no cost to you for labor, materials, or return postage if it is sent prepaid to Royal.

This warranty is given by Royal Typewriter Company, a Division of Litton Business Systems, Inc. It applies only to the original purchaser and does not include adjustments, parts or repairs required by circumstances beyond the control of Royal, such as fire or other casualty, accident, neglect, abuse or abnormal use.

Important: To obtain service under terms of this warranty, you must enclose your Bill of Sale when you send your calculator in.

Service

To obtain service under this warranty, send your calculator prepaid to the Royal Special Products Service Center, using the enclosed shipping label.

Return the calculator along with charger and stylus in its original carton. If not available, send a check or money order for \$1.00 to the Royal Service Center and a shipping carton will be sent to you. Your calculator will be repaired or replaced with a factory serviced unit within 14 days of receipt by Royal.

ROYAL ELECTRONIC CALCULATOR REGISTRATION CARD

Model

Dealer's Name _____

Address _____

Serial Number _____

Date of Purchase _____

Purchase Price _____

I TYPE OF STORE WHERE PURCHASED:

- 1 ☐ Department Store
- 2 ☐ Camera Shop
- 3 ☐ Discount Store
- 4 ☐ Appliance Store
- 5 ☐ Office Equipment Store
- 6 ☐ Stationery Store
- 7 ☐ Other

II THIS CALCULATOR WAS PURCHASED:

- 9 ☐ By Owner or Manager of Business Establishment
- 0 ☐ As a Gift for Someone Else
- 1 ☐ By Professional/Technical Person (Doctor, Engineer, Lawyer, Salesman, etc.)
- 2 ☐ For My Own Personal Use

III THE PRINCIPAL USER WILL BE:

- 4 ☐ Male
- 5 ☐ Female

IV AGE OF THE PRINCIPAL USER WILL BE:

- 7 ☐ Under 18
- 8 ☐ 18-21
- 9 ☐ 22-35
- 0 ☐ 36-49
- 1 ☐ Over 50

V MARITAL STATUS:

- 3 ☐ Single
- 4 ☐ Married

VI RESIDENCE:

- 6 ☐ Home
- 7 ☐ Apartment
- 8 ☐ Own
- 9 ☐ Rent

VII OCCUPATION: _____

VIII EDUCATION:

- 2 ☐ Completed College
- 3 ☐ Some College
- 4 ☐ High School
- 5 ☐ Grammar School

IX PRIMARY USE OF THIS CALCULATOR WILL BE:

- 7 ☐ Business or Professional
- 8 ☐ Personal (Checking Account, taxes, etc.)

X CALCULATOR WILL BE USED AT:

- 0 ☐ Place of Business
- 1 ☐ Home
- 2 ☐ Both
- 3 ☐ Traveling

XI IS AN ADDING MACHINE IN USE IN YOUR HOME?

- 5 ☐ No
- 6 ☐ Yes

XII WHAT SINGLE FACTOR BELOW MOST INFLUENCED THE DECISION TO BUY THIS PARTICULAR MODEL?

- 8 ☐ Appearance
- 9 ☐ Features
- 0 ☐ Price
- 1 ☐ Royal Reputation
- 2 ☐ Advertisements
- 3 ☐ Recommended by Retailer

Name _____

Address _____

City _____ State _____ Zip _____

PLACE
POSTAGE
STAMP
HERE

ROYAL TYPEWRITER COMPANY

Division of Litton Business Systems, Inc.

150 New Park Avenue

Hartford, Connecticut 06106

ELECTRONIC CALCULATOR SERVICE REQUEST CARD

When requesting service, please complete this form and return it with your calculator.

Owner _____

Street _____

City _____

State _____ Zip _____

Date of Purchase _____

Serial Number _____

_____ Failed after _____ days' operation.


Please describe difficulty _____

Note: Enclose Bill of Sale, Cash Register receipt or reasonable facimile when you send your calculator in for service.

ACCESSORIES for your ROYAL DIGITAL CALCULATOR

I. High Speed AC Converter/Charger

A deluxe accessory
for your Royal
Digital Calculator

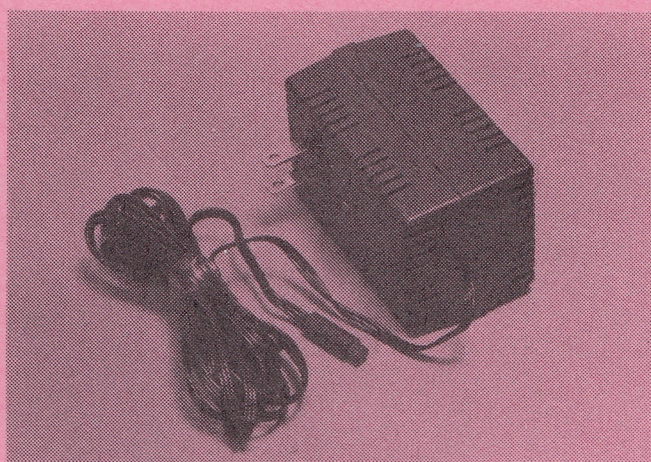

It's Fast — a complete charge for your Calculator in 3½ hours.

It's Convenient — your calculator operates directly from AC current while the battery is charging.

It's Sure — a signal light glows until your calculator is completely charged.

It's Safe — your calculator will never overcharge, regardless of how long you keep the charger attached.

It's Economical — all these benefits — speed, convenience, reliability and safety are yours for only \$12.95 plus \$1.00 for shipping and handling.

II. Replacement Stylus

If your calculator stylus is lost or mislaid, a replacement unit may be ordered directly from Royal for only \$2.95 plus \$.50 handling.

Use the convenient order form for either or both of these accessories.

Send To: Royal Typewriter Company
P.O. Box K
160 Pascone Place
Newington, Connecticut 06111
Attention: Special Products Department

Gentlemen:

Please send me

- ☐ 1. The new High Speed AC Converter/Charger at \$12.95 plus \$1.00 handling.
(Part #A438-20001-OA)
- ☐ 2. Replacement Stylus at \$2.95 plus \$.50 handling.
(Part #617-04004-OA)

My check ☐ or Money Order ☐ in the amount of _____ is enclosed.

Name: _____
Please type or print clearly

Address: _____

City: _____

State: _____ Zip _____

This order will be delayed if zip code is not included.

IMPORTANT

To charge your Calculator battery:

1. Plug the charger into any floor or wall outlet.
2. Put the Calculator switch in center (off) position.
3. Plug the Calculator into the charger. (A complete recharging cycle takes 16 hours. After charging — unplug the Calculator from the charger.)

NOTE:

If you wish to operate your Calculator while it is being charged, move the Calculator switch to DC (on). This automatically stops the charging process but it will continue as soon as the switch is moved to center (off).

The “AC” position is for a high speed charger, an extra cost option.